


**PLANT SCHEDULE**

DECIDUOUS TREES	QTY	BOTANICAL / COMMON NAME	CONT	CAL	SIZE
ACE RUB	11	ACER RUBRUM / RED MAPLE	B & B	3" CAL	
NYS SYL	6	NYSSA SYLVATICA / BLACK GUM	B & B	3" CAL	
PLA XLP	6	PLATANUS X ACERIFOLIA / LONDON PLANE TREE	B & B	3" CAL	
EVERGREEN TREES	QTY	BOTANICAL / COMMON NAME	CONT	CAL	SIZE
JUN VIR	4	JUNIPERUS VIRGINIANA / EASTERN RED CEDAR	B & B		5'-6" HGT.
PIN STR	5	PINUS STROBUS / WHITE PINE	B & B		6'-7" HGT.
FLOWERING TREES	QTY	BOTANICAL / COMMON NAME	CONT	CAL	SIZE
COR FLO	10	CORNUS FLORIDA / FLOWERING DOGWOOD	B & B	3" CAL	
CLUMP TREES	QTY	BOTANICAL / COMMON NAME	CONT	CAL	SIZE
BET NEG	7	BETULA NIGRA / RIVER BIRCH MULTI-TRUNK	B & B		10'-12" HGT.
SHRUBS	QTY	BOTANICAL / COMMON NAME	SIZE	SIZE	SP
AME CAN	7	AMELANCHIER CANADENSIS / SHADBLow SERVICEBERRY MULTITRUNK	B & B	5'-6" HGT.	
CLE ALN	12	CLETHRA ALNIFOLIA / SWEET PEPPER BUSH	3 GAL	15'-18" HGT.	
HYD MA2	9	HYDRANGEA MACROPHYLLA 'ENDLESS SUMMER' TM / BALMER HYDRANGEA	B & B	2'-2.5' SPR.	
ILE GL2	65	ILEX GLABRA / INK BERRY HOLLY	B & B	24'-30" HGT.	
MYR PE2	35	MYRTICA PENNSYLVANICA / NORTHERN BAYBERRY	B & B	24'-30" HGT.	
RHO EJ2	12	RHODODENDRON X 'P.J.M.' / P.J.M. RHODODENDRON	B & B	24'-30" HGT.	
RAIN GARDEN	QTY	BOTANICAL / COMMON NAME	SIZE	SIZE	SP
ARO MLN	12	ARONIA MELANOCARPA / BLACK CHOKEBERRY	3 GAL		
EUP JOE	6	EUPATORIUM MACULATUM / JOE PYE WEED	2 GAL		
SPI MEA	15	SPIRAEA ALBA / MEADOWSWEET	3 GAL		
VIB AM2	3	VIBURNUM TRILOBUM / AMERICAN CRANBERRYBUSH	B & B	2' - 5' HGT.	
GROUND COVERS	QTY	BOTANICAL / COMMON NAME	CONT	SIZE	
AST PER	72	ASSORTED PERENNIALS / ASSORTED PERENNIALS	1 GAL		24" cc.
NE WET	1647 SF	NE. WET MIX / LOAM, FINE GRADE & SEED	SEED		
NE GRN	2372 SF	SHOWY NORTHEAST NATIVE WILDFLOWER SEED MIX / LOAM, FINE GRADE & SEED	SEED		
		ERNST CONSERVATION SEEDS, INC. (ERNMX-153-1)			

**CONSERVATION NOTES**

1. ALL WORK TO BE DONE IN ACCORDANCE WITH THE DEP ORDER OF CONDITIONS IN ADDITION TO ALL LOCAL ORDINANCES.
2. NO HERBICIDES OR PESTICIDES SHALL BE USED ON SUBJECT PROPERTY.
3. NO PRUNING OR VEGETATIVE CLEANING WITHIN THE WETLAND SETBACKS. ANY PRUNING OR CLEARING OUTSIDE OF THE WETLAND SETBACKS TO BE COMPLETED ONLY UNDER THE SUPERVISION OF LANDSCAPE ARCHITECT.
4. THE LIMIT OF WORK LINE SHALL BE PERMANENTLY MARKED AFTER REMOVAL OF THE HAYBALE LINE OR OTHER APPROVED S.E.C. METHODS.
5. A BUFFER ZONE OF NATURAL VEGETATION SHALL BE LEFT UNDISTURBED OUTSIDE THE WORK LIMIT AREA.
6. ALL PLANT BEDS TO BE MULCHED WITH AN ORGANIC NATURAL SHREDDED HARDWOOD MULCH.
7. ALL INVASIVE PLANT SPECIES ON SITE TO BE REMOVED.

REVISIONS	
7/5/22	REVISIONS PER PIER REVIEW COMMENTS
8/2/22	REVISIONS PER TOWN AND STATE COMMENTS

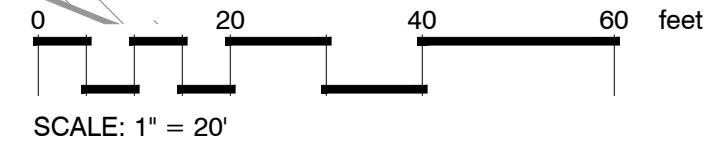

**LANDSCAPE PLAN**  
7 NEW DRIFTWAY  
SCITUATE, MASSACHUSETTS

PREPARED FOR:  
DRIFT-WAY, LLC  
PO BOX 378  
TYNGSBORO, MA 01879


MAY 6, 2022  
SCALE: 1"=20"  
JOB No. 22-150



**GRADY CONSULTING, L.L.C.**


Civil Engineers, Land Surveyors & Landscape Architects  
71 Evergreen Street, Suite 1, Kingston, MA 02364  
Phone (781) 585-2300 Fax (781) 585-2378

NOTES:  
ON TREES BELOW 3" CAL. USE WOOD STAKES.  
ON TREES 3" CAL. OR GREATER USE GUYING CABLES.  
IF GUYING CABLES USE 3 PER TREE

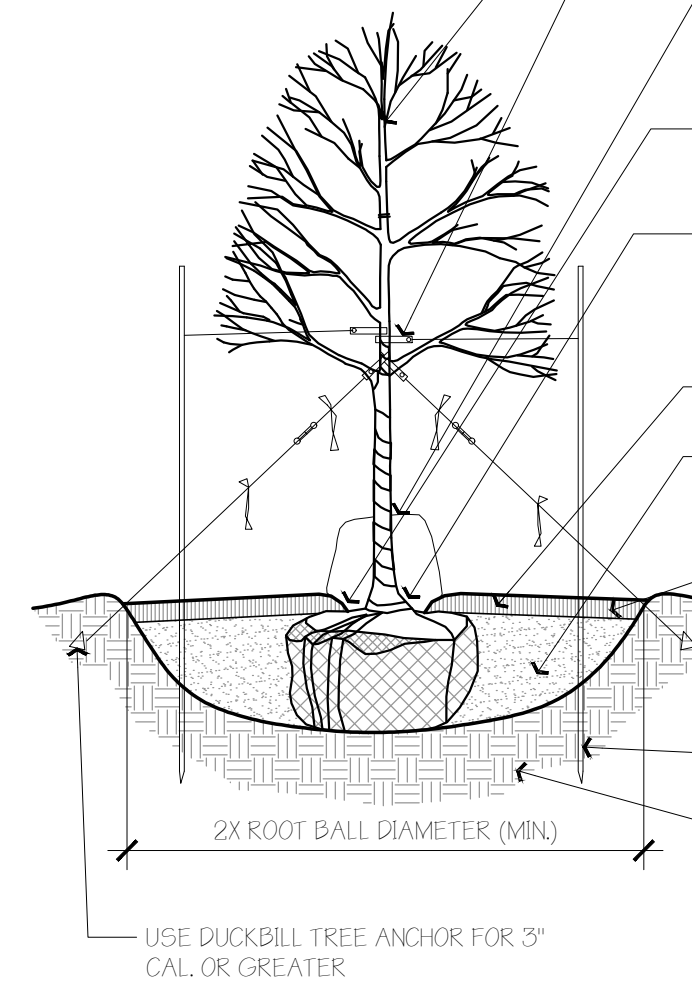


**SHADE / FLOWERING TREE DETAIL**  
1/2" = 1'-0"  
3229345.01.01

INSTALL TREE PLUMB - L.A. TO APPROVE FACE / ORIENTATION OF TREES ON SITE  
NON-GURDELING STRAP SUCH AS CHAIN LOCK OR ARBORTAPE  
INSTALL TREE GATORS ON ALL TREES NOT COVERED BY IRRIGATION AS PER MANUFACTURER'S SPECIFICATIONS. CONTRACTOR TO MAINTAIN DURING PERIOD OF WARRANTY  
TREE SHALL BE PLANTED 2" ABOVE SURROUNDING GRADE - TREE SHALL BE PLUMB AFTER SETTLEMENT  
IF ROOTBALL IS WRAPPED IN PLASTIC OR NON-BIODEGRADABLE MATERIAL REMOVE ENTIRE WRAP - IF WRAPPED IN BURLAP, CUT OPEN AT LEAST 1/3 OF TOP  
3" PINE BARK MULCH (UNLESS OTHERWISE NOTED ON PLANS)  
HAND EXCAVATE HOLE TO DIAMETER 2X WIDER THAN ROOT BALL - PRUNE ROOT FLARE - BACKFILL HOLE WITH PLANTING SOIL MIX AS SPECIFIED  
EARTH SAUCER TO CONTAIN 3" MULCH - PULL MULCH 3'-6" AWAY FROM TRUNK OF TREE (KNOCKDOWN/REMOVE SAUCER AFTER FIRST SEASON)  
USE 2'X2" HARDWOOD STAKE (FOR BELOW 3" CAL.)  
UNDISTURBED SUBGRADE  
NOTE:  
FOR ALL FALL PLANTING, WRAP TRUNK AS SPECIFIED TO 2ND LOWEST BRANCH - REMOVE THE FOLLOWING SPRING  
ALL TREES SHALL BE FLOODED TWICE DURING THE FIRST 24 HOURS AFTER PLANTING

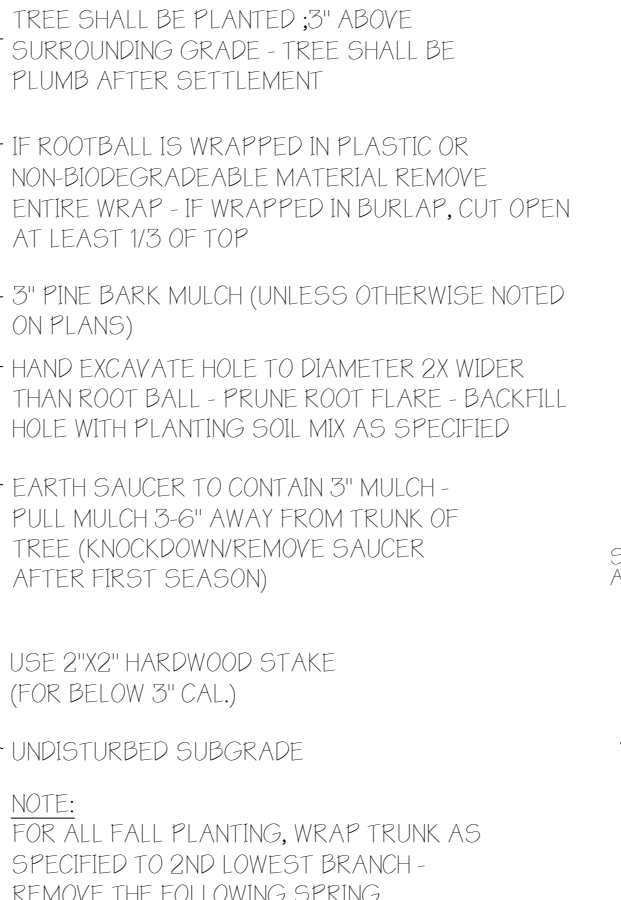


**TREE GUYING DETAIL - MULTISTEM**  
1/2" = 1'-0"  
3229345.02.01

HOSE LOOP TO PROTECT TREE  
INSTALL GUY ON EACH MAJOR STEM & WIRE ALL MAJOR STEMS TOGETHER ATTACH 13 GAUGE GALV. MALLEABLE STEEL GUY WIRE 2/3 HEIGHT OF THE TREE IN REINFORCED RUBBER HOSE WITH CABLE CLAMPS - SECURE BY TWISTING TAUTLY  
GALVANIZED TURNBUCKLES - 1 PER CABLE  
(3) 2"x3"x4" FIR POSTS - ATTACH GALVANIZED MALLEABLE STEEL CABLE TO POST AND SECURE BY TWISTING TAUTLY - SET ANGLE OF POST & GUY TO ENTER GROUND AT THE LIMIT OF THE SPREAD OF THE BOTTOM BRANCHES - STAKES SHALL BE OUTSIDE OF TREE PIT

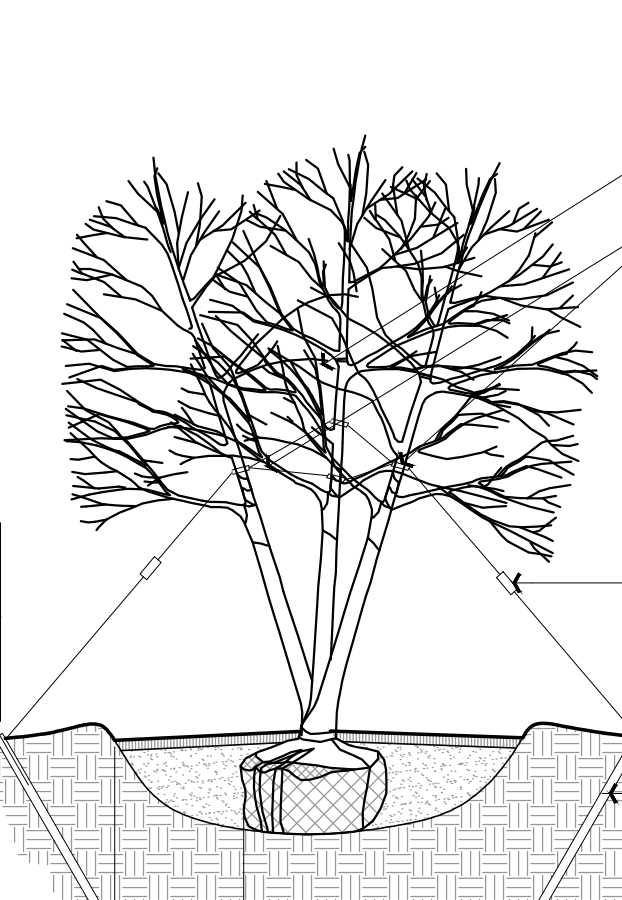


**SHRUB DETAIL**  
1/2" = 1'-0"  
3229335.00.02

REMOVE ALL DEADWOOD (DO NOT REMOVE ANY OTHER VEGETATION)  
SHRUBS SHALL BE PLANTED 2" ABOVE SURROUNDING GRADE - SHRUBS SHALL BE PLUMB AFTER SETTLEMENT  
CUT AND REMOVE BURLAP FROM TOP 1/3 OF ROOTBALL IF ROOTBALL IS WRAPPED IN PLASTIC OR NON-BIODEGRADABLE MATERIAL REMOVE ENTIRE WRAP  
3" PINE BARK MULCH (UNLESS OTHERWISE NOTED ON PLANS)  
TEMPORARY MOUND WITH EXCAVATED SOIL TO 3" ABOVE FINISHED GRADE  
BACKFILL WITH PLANTING STANDARD MIX  
ROOTBALL ON UNDISTURBED SUBGRADE  
PLANTING STANDARD SOIL MIX:  
1/3 PEAT - BLEND MANURE  
1/3 HIGH ORGANIC LOAM  
1/3 EX. SOIL

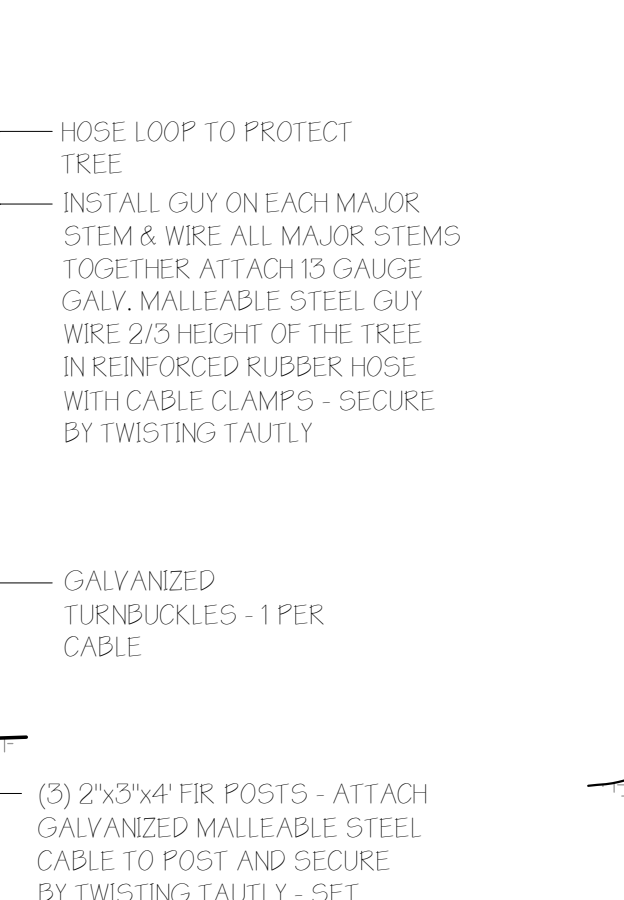

**SEASONAL COLOR / PERENNIAL / GROUNDCOVER**  
1/2" = 1'-0"  
3229335.02.01

SEE PLANT SCHEDULE FOR SPACING  
EDGE OF PAVEMENT/LAWN  
GROUND COVER / SEASONAL COLOR  
2" PINE BARK MULCH  
FLOWER BED PLANTING SOIL MIX AS SPECIFIED  
UNDISTURBED SUBGRADE

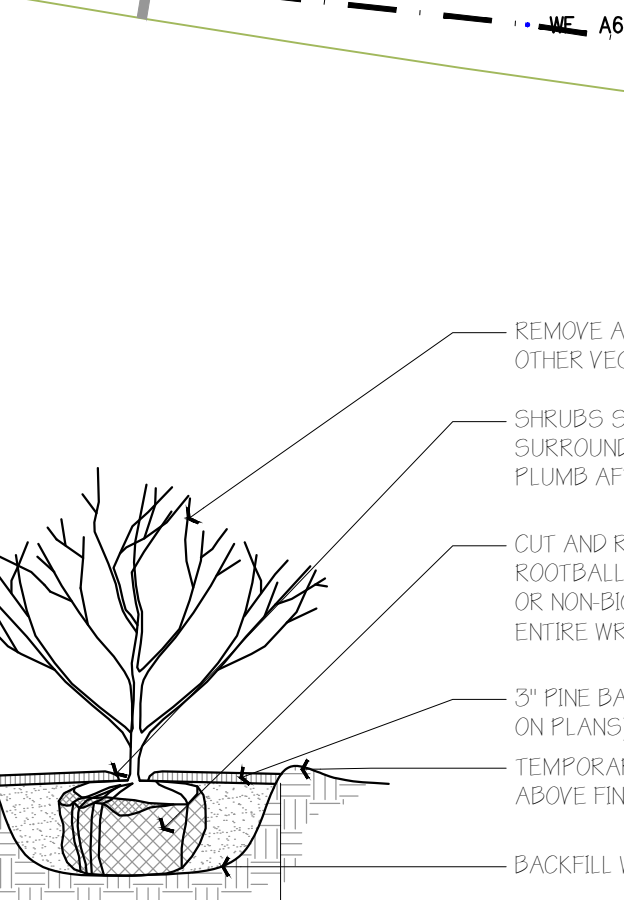

**SEASONAL COLOR / PERENNIAL / GROUNDCOVER**  
1/2" = 1'-0"  
3229335.02.01